


**ASYMMETRIC BELTS**

**STANDARDS:**

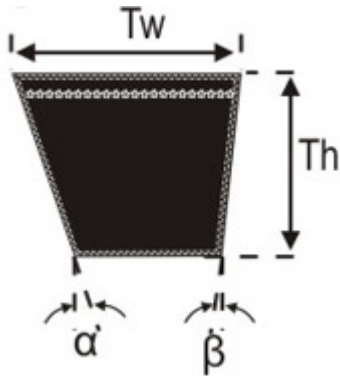

$T_w$	$T_h$	$\alpha$	$\beta$	Length (mm)	Length Designation
19	10	18°	2°	1005	La
16	9	18°	2°	695	La
19	10	18°	2°	740	La
19	8	18°	2°	680	La
19	10	18°	2°	685	La

**Features:**

Asymmetric belts find application in torque converter systems. They are generally used in high performance golf-kart, snowmobiles, minibikes, material handling and Industrial equipment.