


PIX-X'TRA ®

STANDARDS: RAW EDGE MOULDED COGGED BANDED BELTS

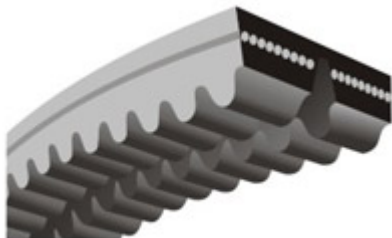

Section	Dimensions		Angle (Deg)	Pitch (mm)	Manufacturing Range		
	Top width (mm)	Thickness (mm)			Min	Max	Length Designation
HAX	13.0	10.0	36	15.9	23.5"	200"	Li
HBX	17.0	13.0	36	19.0	23.5"	200"	Li
HCX	22.0	16.0	36	25.5	23.5"	200"	Li
HXPZ	10.0	10.0	36	12.0	600 mm	5080 mm	Lp
HXPA	13.0	12.0	36	15.0	600 mm	5080 mm	Lp
HXPB	17.0	16.0	36	19.0	600 mm	5080 mm	Lp
HXPC	22.0	20.0	36	25.5	600 mm	5080 mm	Lp
H3VX	9.7	10.0	36	10.3	23.5"	200"	La
H5VX	15.8	16.0	36	17.5	23.5"	200"	La
HAVX-10	10.0	8.0	36	12.6	600 mm	5080 mm	La
HAVX-13	13.0	10.0	36	16.0	600 mm	5080 mm	La

Conforms to ISO 5291, BS 3790, ISO 5290 & DIN 7753 Standards.