


**PIX-X'SET<sup>®</sup> DS**

**STANDARDS:** HEXAGONAL BELTS

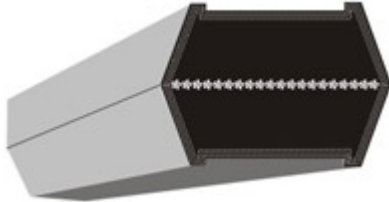

Section	Dimensions		Angle (Deg)	Standard	Recommended Minimum Pulley Diameter (mm)	Manufacturing Range		
	Top width (mm)	Thickness (mm)				Min (inch)	Max (inch)	Length Designation
<b>AA</b>	13.0	10.0	40	IS 11038, ISO 5289	80	43	260	Li
<b>BB</b>	17.0	14.0	40	IS 11038, ISO 5289	125	40	660	Li
<b>CC</b>	22.0	17.0	40	IS 11038, ISO 5289	224	73	658	Li
<b>25</b>	25.0	22.0	40	RMA IP 21, IS 11038, ISO 5289	280	89	681	Le