


PIX-X'SET[®] DS

STANDARDS: HEXAGONAL BELTS

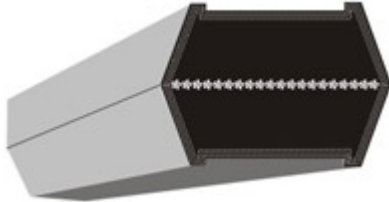

Section	Dimensions		Angle (Deg)	Standard	Recommended Minimum Pulley Diameter (mm)	Manufacturing Range		
	Top width (mm)	Thickness (mm)				Min (inch)	Max (inch)	Length Designation
AA	13.0	10.0	40	IS 11038, ISO 5289	80	43	260	Li
BB	17.0	14.0	40	IS 11038, ISO 5289	125	40	660	Li
CC	22.0	17.0	40	IS 11038, ISO 5289	224	73	658	Li
25	25.0	22.0	40	RMA IP 21, IS 11038, ISO 5289	280	89	681	Le