


PIX-X'SET[®]

STANDARDS: CLASSICAL BELTS

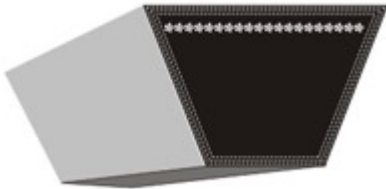

Section	Dimensions		Angle (Deg)	Standard	Recommended Minimum Pulley Diameter (mm)	Manufacturing Range		
	Top width (mm)	Thickness (mm)				Min (inch)	Max (inch)	Length Designation
8	8.0	5.0	40	DIN 2215	40	35.0	172.0	Li
Z	10.0	6.0	40	IS 2494, BS 3790, ISO 4184	50	9.50	195.0	Li
A	13.0	8.0	40	IS 2494, BS 3790, ISO 4184	71	13.0	360.0	Li
B	17.0	11.0	40	IS 2494, BS 3790, ISO 4184	112	16.0	658.0	Li
20	20.0	13.0	40	DIN 2215	160	35.5	375.0	Li
C	22.0	14.0	40	IS 2494, BS 3790, ISO 4184	180	31.0	658.0	Li
25	25.0	16.0	40	DIN 2215	250	57.0	655.0	Li
D	32.0	19.0	40	IS 2494, BS 3790, ISO 4184	355	44.5	662.0	Li
E	38.0	23.0	40	IS 2494	500	90.0	658.0	Li